


LED AUXILIARY DRIVING LAMP

22836 / 770330

- High Power 9W LEDs for exceptional performance (reference no. 30)
- Optimal illumination provides excellent visibility
- Increases driver's safety and comfort with less eye fatigue
- Engineered to withstand extreme vibration, shock, dust, and water immersion
- Perfected heat management for long-lasting performance
- Aluminum alloy housing for ultra-light weight (2450g)
- Suitable for extreme terrain and climate
- Complies with E-mark regulations




Snap-on cover quick mount to lamp

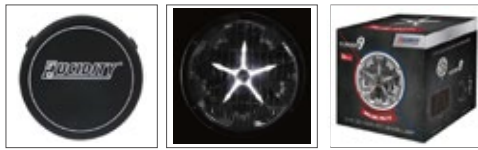



69836

Front Position

Value Pack in 2

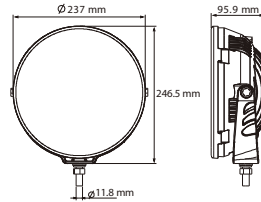

Virtual Reality

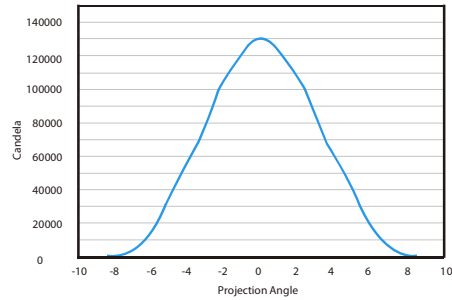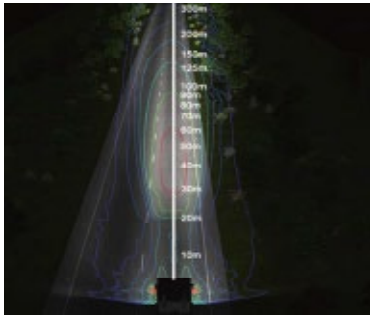

Specs

Voltage	12~36V	Current Draw	13.5V at 3.34A±0.31A	Material	Resistant	✓
SMD high power LEDs	5		28V at 1.72A±0.21A	Cover	Water	✓
Watt	50	ECE	R7 and R112	Bracket	Dust	✓
Raw lumen	3000	Connection	300 mm cable	Lens	Shock	✓
Effective lumen	1800	Weight	2450g	Housing	Warpage	✓
HV CD	130000	Std pack qty	5	Hardware	Temperature	-30°C~50°C
Front position	✓					
High beam	✓					
Cover	69836					


LED AUXILIARY DRIVING LAMP

22829 / 770331

- High Power 9W LEDs for exceptional performance (reference no. 20)
- Optimal illumination provides excellent visibility
- Increases driver's safety and comfort with less eye fatigue
- Engineered to withstand extreme vibration, shock, dust, and water immersion
- Perfected heat management for long-lasting performance
- Aluminum alloy housing for ultra-light weight (1640g)
- Suitable for extreme terrain and climate
- Complies with E-mark regulations




Snap-on cover quick mount to lamp

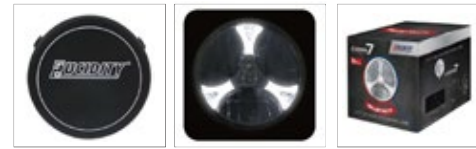



69829

Front Position

Value Pack in 2

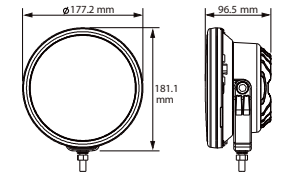

Virtual Reality

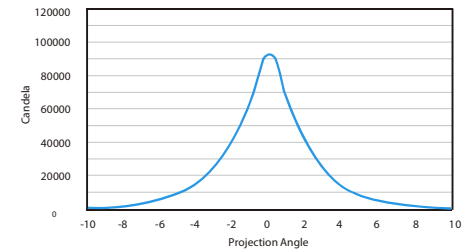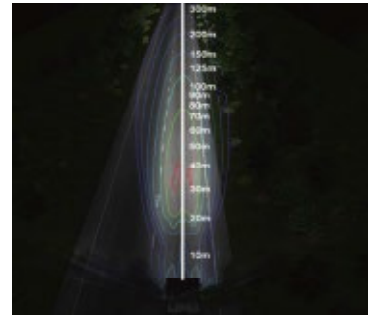

Specs

Voltage	12~36V	Current Draw	13.5Vat 0.8A±0.25A	Material	Resistant	✓
SMD high power LEDs	3		28Vat 0.39A±0.13A	Cover	Water	✓
Watt	11	ECE	R7 and R112	Bracket	Dust	✓
Raw lumen	1800	Connection	250 mm cable	Lens	Shock	✓
Effective lumen	1120	Weight	1640g	Housing	Warpage	✓
HV CD	92000	Std pack qty	10	Hardware	Temperature	-30°C~50°C
Front position	✓					
High beam	✓					
Cover	69829					